
USE OF IMAGE INPAINTING APPROACH IN RECONSTRUCTION AND RECOGNITION OF LATENT FINGERPRINT

Vishal Mani Tiwari,

Computer Science and Engineering,
Radha Govind Group of institutions, Meerut UP, India

ABSTRACT: - Verifying latent fingerprints is important for law enforcement companies to capture criminals and terrorists. Compared to Live Scan and fingerprint inked, the picture quality of the latent fingerprints is much low with difficult picture environment, not clear ridge composition and even overlapped patterns. This kind of print can't be recycled in the law courtyard of rules straight to store an opinion if can be corresponding to recognized print. Physical latent fingerprint recognition is a dull, expensive & time overriding procedure, which is used to restore misplaced ridges. So, Researchers are continuously working to design an autonomous latent fingerprint recognition system. In this paper, a novel approach of image inpainting is used for the reconstruction and recognition of latent fingerprints. Image Inpainting is the process to recover/fill up the distorted and broken portion of image using the neighbour pixels. Image Inpainting based exemplar inpainting approach has been used for this work. The proposed concept has been experimented for the dataset of FVC 2002 database.

KEYWORDS: Latent Fingerprint, Image Inpainting, Ridges Reconstruction, Exemplar Inpainting, Minutiae Information

I. INTRODUCTION

A biometric system is considered as a pattern recognition system. In this, the features are extracted from the obtained data and then compared with the stored template to make a decision on the identity of human being. It is a feasible and a reliable way to identify and authenticate the person because the traditional methods include the knowledge based identification system. The knowledge based identification includes passwords, personal identification number or token based identification systems such as passport, driving license. These systems are not considered secured as they can be easily stolen, lost or shared but a biometric trait is always present on the body of authorized user. Therefore, Biometric Recognition can be defined as the use of different physiological and behavioural characteristics for identifying human beings. A biometric system works for the three fields i.e. Enrolment, Identification and Verification system. There exists a list of techniques for the recognition of fingerprints. But there exists several challenges in case of latent fingerprints

Latent fingerprints are by chance fingerprints which are left by criminal at a crime scene. These types of fingerprints are of very poor quality and highly distorted [1]. According to the noise level present in latent fingerprint, it can be classified into three types i.e. latent with background noise, partial latent and overlapping latent [2]. In current practice, the minutiae are marked manually in latent. Latent fingerprints can vary in the information content and quality level depending upon the presence of surface and skin type. It can be found with different background noise level, overlapping finger marks and quantity of latent presence. With all these challenges, manual recognition of latent fingerprints is not efficient approach [3]. There may be need to reconstruct the spoiled latent fingerprint (edges, ridge structure, minutiae information), enhancement in quality to reduce background noise and final recognition with quick approach. This paper presents an autonomous approach for the reconstruction and recognition of latent fingerprints. Image Inpainting based exemplar approach is considered for the reconstruction of spoiled latent fingerprint ridges, edges etc.

The entire process is divided into three sections of latent fingerprint enhancement, reconstruction and recognition. For initial enhancement Sobel filter is used. For the latent fingerprint reconstruction exemplar inpainting is used. Then, final recognition of latent fingerprints is performed with minutiae based information.

For experimentation FVC 2002 fingerprint dataset is used. It consists of latent to rolled fingerprints [4]. These images are of approximate 500 PPI. These images are taken using capacitive and sensor dataset. Some sample images are shown in figure 1.



Figure 1: Dataset Images of FVC 2002

Other sections of the paper are discussed in the following manner: Section 2 presents the existing work for latent fingerprint reconstruction, enhancement and recognition. Section 3 discusses the basic concept of sobel filter and Exemplar inpainting. Section 4 describes the proposed concept for latent fingerprint recognition. Section 5 concludes the paper.

II. RELATED WORK

There are lot of work for the latent fingerprint enhancement, reconstruction and recognition. Some of the existing work is presented here.

The paper of [Cao et al., 2014] proposed a dictionary approach for the enhancement of latent fingerprints. The author gives heavy discussion of latent fingerprint enhancement methods which have been explained in the literature [5]. The discussed method works on ridge structure dictionary which is used for latent segmentation and enhancement. The dictionary is learnt from high quality dictionary patches. The ridge quality of a patch is defined as the structural similarity between the patch and its reconstruction from the learnt ridge structure dictionary. For good performance and accuracy, the dictionary works at two levels i.e. coarse level and fine level. Dictionary approach consists of two types of stages i.e. off line and online dictionary stage. This method is fully automatic and reliable. However, the scheme still does not work well on poor quality partial latent fingerprints. The algorithm can be further improved by work on computational efficiency.

Liu et al. [6] have proposed the novel combined form of total variation model and multiscale path based sparse representation method. In this combined approach total variation model is used to decompose the latent fingerprints into texture & cartoon components. Here, cartoon components are removed and texture components having latent fingerprint impressions are further used for enhancement by using multiscale path based sparse representation method. The proposed algorithm also restores and enhances the corrupted fingerprints along with the removal of structured noise from images.

According to [Rahmes et al., 2007] partial fingerprints are enhanced and completed with Partial Differential Equation (PDE) Inpainting and Exemplar Inpainting approach [7]. The ridge lines are sharpened with anisotropic filters. The discussed method is an automated reconstruction method and reduces manual mark-up. The objective of this algorithm is to connect the ridges pixel by pixel to minimize the interpolation error and to decrease its complexity. It has been reviewed that PDE does a good job in small damaged regions, but for the larger damaged regions the results are not good. Unlike the PDE Inpainting approaches

which have limitations based on the size of the void to be filled in and the smoothness, the Exemplar method is aptly suited for replenishing larger voids and those containing high frequency data. In this paper, the voids are created manually.

An image enhancement method proposed by [Zhou et al., 2013], which is based on prior based knowledge concept and tried to implement 'Lights out identification' system [8]. The paper explains the three different reasons for the need of an AFIS. The author reviews published algorithms of orientation field estimation. The algorithms are coarsely defined into three categories i.e. Local Estimation, Smoothing and Global Parametric models. The algorithm also works in two stages i.e. offline stage and online stage. With a minor modification, the algorithm can also estimate the orientation field of overlapped latent fingerprints and its performance is comparable to the state-of art special purpose algorithm. However, the discussed algorithm is still inferior to manual marking, especially on low-quality latent, and its speed is slow. It requires manual mark-up of ROI and segmentation. The algorithm performance can be further improved by developing automatic region of segmentation and ROI.

Separation of overlapping fingerprints algorithm was proposed by [Shi Yuan et al., 2011]. The overlapping fingerprints are also lifted from the crime scene [9]. It is necessary to separate them for the identification of an individual. The challenge in overlapping fingerprints is accurate estimation of orientation fields of each fingerprint. This paper proposed a robust orientation field estimation algorithm. The first step to separate overlapped fingerprints is region segmentation. The image is segmented into three parts i.e. background region, overlapped region and two non overlapped region. An overlapped fingerprint image is segmented into non overlapping blocks of 16×16 pixels. Region mask, orientation field and frequency map are defined on blocks. The author calculates Discrete Fourier Transform in the window of 64×64 pixels around an overlapped block. After initial orientation field estimation, constrained relaxation labelling is used to determine the labels of overlapped blocks. The proposed algorithm also works on two component fingerprints which are from the same finger. This type of overlapping occurs when the same location of an object is touched by the same finger several times. Such overlapped fingerprints are common in weapons used by criminals, doorknobs, bottles, etc. The limitation of this paper is that it is not fully automatic yet.

A novel and efficient algorithm that combines the advantages of both texture synthesis and inpainting proposed by [Criminisi et al., 2004]. Texture synthesis means generation of large regions from available information present in an image and inpainting states fill gaps or void regions present in an image [10]. The patch which has highest priority will undergo for enhancement. The priority of patches is computed with confidence and data term. After priorities there is propagation of texture and structure information. The pixels of target region patches are filled with the help of source region. After filling the patches, the confidence values of patches are updated. The algorithm is applied on purely synthetic images to full-colour photographs that include complex textures. There is also side by side comparison to previously proposed methods. In all of the experiments, the patch size was set to be greater than the thickest structure (e.g., edges) in the source region.

The author [Yang et al., 2014] proposed a bio-cryptosystem based on fixed-length bit-string representations extracted from modified VNSs, which are rotation- and translation-invariant and distortion robust [11]. The author takes the full advantage of local Voronoi neighbour structures (VNSs), e.g. local structural stability and distortion insensitivity. The reviewed alignment-free bio-cryptosystem is able to provide strong security while achieving good recognition performance. Three performance indices are used for performance evaluation: (1) false reject rate (FRR), (2) false accept rate (FAR), and (3) equal error rate (EER), which is defined as the error rate when the FRR and FAR are equal. The experimental results proved the validity of proposed scheme. But it is also likely to introduce some fake Voronoi neighbor minutiae. The use of order 1 triangle algorithm can reduce the possibility of adding fake minutiae, but it is not 100% effective.

III. BASIC CONCEPTS

This section presents the basic concepts of sobel filter and exemplar inpainting approach. These concepts are explained as below:

A. EXEMPLAR INPAINTING

Image Inpainting is the process to recover/fill up the distorted and broken portion of image using the neighbor pixels. Image Inpainting is one of the commonly used approaches in Photoshop for the image retouching. Exemplar Inpainting is a patch based texture synthesis approach used to reconstruct the missing portion of latent image [12]. Exemplar inpainting mainly works based on priority of the gradient scene [13]. Exemplar Inpainting is the combination of texture and inpainting approach where texture based available information is used to recover the distorted latent region using inpainting approach.

B. SOBEL FILTER

Sobel filter [14] is used in edge detection algorithms. It is very similar to Prewitt filter (used by the operator to calculate the gradient of image intensity at each point). The major difference in between two filters is the coefficients of covers are not fixed & they can be familiar according to our requirement.

IV. PROPOSED FRAMEWORK

This section presents the step wise explanation for the latent fingerprint enhancement, reconstruction and recognition. Initially, Image preprocessing steps of segmentation and enhancement is performed. Then Reconstruction is performed to recover the broken edges and curves. After reconstruction, post-processing steps of recognition based on Minutiae information is performed. Also a stepwise work flow is explained in figure 2. This stepwise explanation is below:

Step 1: Consider the FVC 2002 dataset images for the experimentation.

Step 2: Separate the background noisy part of image from the front image portion. This division is performed based on variance value of block wise divided image.

Step 3: Enhance the image using the Sobel filter based on the mask coefficient.

Step 4: This processed image is then reconstructed to restore the broken ridges, edges and curves.

Step 5: For reconstruction, exemplar inpainting approach is used. Exemplar Inpainting approach is used to recover the large distorted ridges and curves.

Step 6: This reconstructed image is further processed to extract the minutiae information so that it can be recognised with the original fingerprint.

Step 7: Further, thinning process is performed to reduce the overlapped minutiae and ridges.

Step 8: Then, minutiae based latent fingerprints are extracted.

Step 9: Further, minutiae information is aligned.

Step 10: Finally, matching of the processed latent fingerprints is performed to find the best match with the original fingerprints.

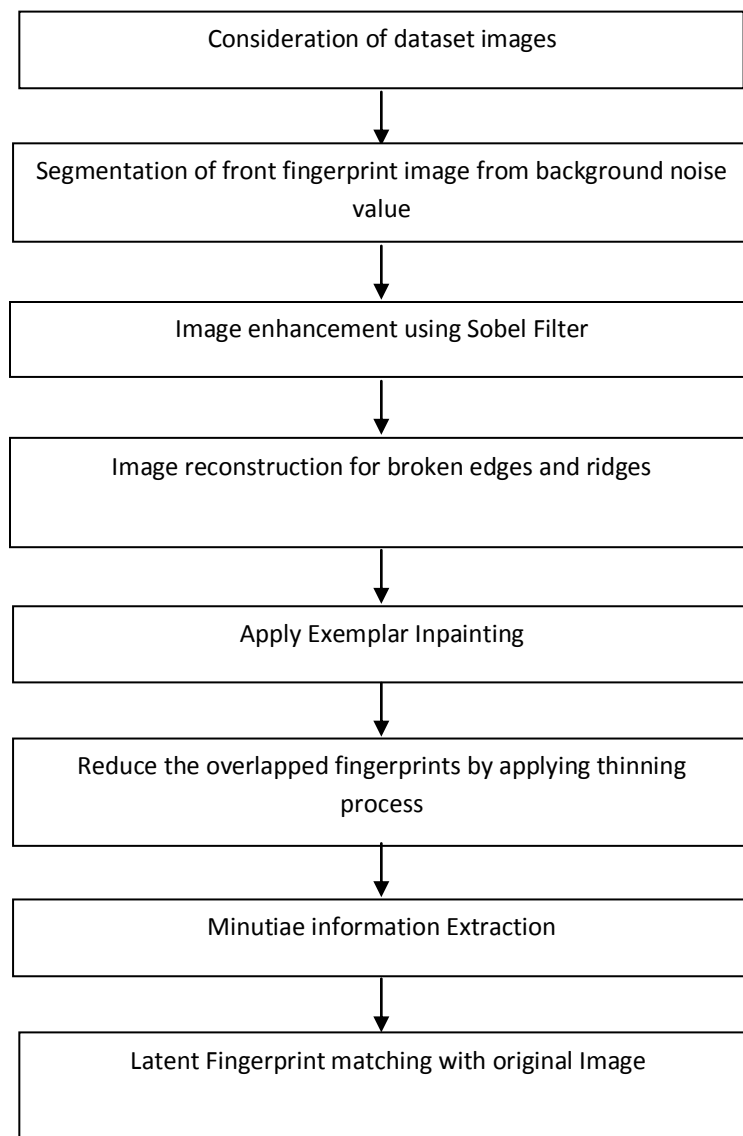


Figure 2: Latent fingerprint Enhancement, Reconstruction and Recognition using Exemplar Inpainting

V. CONCLUSION

Partial latent fingerprints identification can become easy when an algorithm or software completes the gaps between ridges. In the research paper, Exemplar Inpainting is used for completion of the partial latent fingerprint. The Exemplar requires segmentation & ROI. The output image of Exemplar is enhanced with the sobel filter. Final recognition is performed with minutiae information extraction. This paper presents only the proposed concept to resolve the challenges of latent fingerprint identification like spoiled ridges of latent fingerprints, higher value of background noise, lack of publicly availability of latent fingerprint dataset and non-availability of any specific method for fingerprint matching. Overall proposed approach optimizes the solution to identify the best possible match for latent fingerprints. In future, work can be further enhanced with some hybridization of concept with some evaluation parameters.

REFERENCES

1. Feng, Jianjiang, Jie Zhou, and Anil K. Jain. "Orientation field estimation for latent fingerprint enhancement." *IEEE transactions on pattern analysis and machine intelligence* 35, no. 4 (2013): 925-940.
2. Zhang, Jiangyang, Rongjie Lai, and C-C. Jay Kuo. "Adaptive directional total-variation model for latent fingerprint segmentation." *IEEE Transactions on Information Forensics and Security* 8, no. 8 (2013): 1261-1273.
3. Mathew, Ria, Bino Thomas, and Jubilant J. Kizhakkethottam. "Review on latent fingerprint matching techniques." In *Soft-Computing and Networks Security (ICSNS), 2015 International Conference on*, pp. 1-4. IEEE, 2015.
4. Maio, Dario, Davide Maltoni, Raffaele Cappelli, James L. Wayman, and Anil K. Jain. "FVC2002: Second fingerprint verification competition." In *Pattern recognition, 2002. Proceedings. 16th international conference on*, vol. 3, pp. 811-814. IEEE, 2002.
5. Cao, Kai, Eryun Liu, and Anil K. Jain. "Segmentation and enhancement of latent fingerprints: A coarse to fine ridgestructure dictionary." *IEEE transactions on pattern analysis and machine intelligence* 36, no. 9 (2014): 1847-1859.
6. Liu, Manhua, Xiaoying Chen, and Xiaoduan Wang. "Latent fingerprint enhancement via multi-scale patch based sparse representation." *IEEE Transactions on Information Forensics and Security* 10, no. 1 (2015): 6-15.
7. Rahmes, Mark, Josef DeVaughn Allen, Abdelmoula Elharti, and Gnana Bhaskar Tenali. "Fingerprint Reconstruction Method Using Partial Differential Equation and Exemplar-Based Inpainting Methods." In *Biometrics Symposium, 2007*, pp. 1-6. IEEE, 2007.
8. Pandey A., Bansal K.K. (2014) "Performance Evaluation of TORA Protocol Using Random Waypoint Mobility Model " International Journal of Education and Science Research Review Vol.1 (2) pp 193-199
9. Yadav R.K., Bansal K.K.(2012) "Analysis of Sliding Window Protocol for Connected Node" International Journal of Soft Computing and Engineering (IJSCE) Vol.2 (5) pp 292-294
10. Zhou, Jie, Feng, and Anil K. Jain. "Orientation field estimation for latent fingerprint enhancement." *IEEE transactions on pattern analysis and machine intelligence* 35, no. 4 (2013): 925-940.
11. Shi, Yuan, Jianjiang Feng, and Jie Zhou. "Separating overlapped fingerprints using constrained relaxation labeling." In *Proc. International Joint Conference on Biometrics*. 2011.
12. Criminisi, Antonio, Patrick Pérez, and Kentaro Toyama. "Region filling and object removal by exemplar-based image inpainting." *IEEE Transactions on image processing* 13, no. 9 (2004): 1200-1212.
13. Yang, Wencheng, Jiankun Hu, Song Wang, and Milos Stojmenovic. "An alignment-free fingerprint bio-cryptosystem based on modified Voronoi neighbor structures." *Pattern Recognition* 47, no. 3 (2014): 1309-1320.
14. Criminisi, Antonio, Patrick Pérez, and Kentaro Toyama. "Region filling and object removal by exemplar-based image inpainting." *IEEE Transactions on image processing* 13, no. 9 (2004): 1200-1212.
15. Cheng, Wen-Huang, Chun-Wei Hsieh, Sheng-Kai Lin, Chia-Wei Wang, and Ja-Ling Wu. "Robust algorithm for exemplar-based image inpainting." In *Proceedings of International Conference on Computer Graphics, Imaging and Visualization*, pp. 64-69. 2005.
16. Aqrawi, Ahmed Adnan, and Trond Hellem Boe. "Improved fault segmentation using a dip guided and modified 3D Sobel filter." In *SEG Technical Program Expanded Abstracts 2011*, pp. 999-1003. Society of Exploration Geophysicists, 2011.